


PCE data sheet

| | |
|------------------------|--|
| article# | 2455-6 |
| article description | CEE-connector 125A 5p 6h IP67 pilot contact POWER TWIST |
| description long | CEE-connector 125A 5p 6h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 5 (3P+N+PE) clock-position: 6h rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws IP protection class: IP66/IP67 Extra: pilot contact with screw terminal (rated current 2A) |
| GTIN (EAN) | 9003399024009 |
| country of origin | AT |
| customs number | 85366990 |
| packaging quantity | 2 |
| minimum order quantity | 2 |



| | |
|---------------------------|----------------------|
| ETIM 7.0 | EC001320 |
| IEC-amperage | 125 A |
| Number of poles | 5 |
| Voltage acc. EN 60309-2 | 400 V (50+60 Hz) red |
| Clock hour position | 6 h |
| Identification colour | Red |
| RAL-number | 7046 |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Angle of plug | Straight |
| Cable entry | Swivel |
| Material | Plastic |
| Contact material | CuZn |
| Surface finish contacts | Untreated |

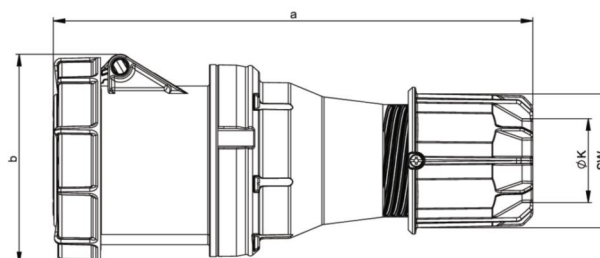

| | |
|--------------------|---|
| a | 287 mm |
| b | 124 mm |
| K (cable Ø) | 22,5-50 mm |
| SW | 81 mm |
| wire flexible | 16-50 / 1-2,5 (pilot contact) mm ² |
| contact screws | 450 / 100 (pilot contact) Ncm |
| strain relief | 1500 Ncm |
| dismantling length | 100 mm |
| stripping length | 24-27 mm |



www.manufacturer-safety.info