

LINEAR MOTORIZED VALVES

FAN COIL VALVE SERIES VLG100

ESBE Valve Series VLG100 is a linear valve suitable for the ESBE linear actuators ALG400. The valves are available in 2-way, 3-way or 3-way with by-pass.



VLG122
2-way

VLG132
3-way

VLG142
3-way with by-pass

APPLICATION

The ESBE series VLG100 is suitable for the control of heated and chilled water in heating, air-conditioning plants and fan coil units. Valves are motorized by ALG400 (electro-thermal actuators). VLG100 has compact dimensions to enable an easy mounting within limited spaces for example on terminal unit coils.

OPERATION

The actuator is able to operate in any mounting position, but it is advisable not to install it down-wards. 3-way and 3-way with by-pass valves should preferably be used as mixing valves. Valves are designed to fulfil water qualities according to VDI 2035.

FUNCTION

Valves can be mounted with diverter function but will have limited usage ie maximum allowed is then limited to 1/3 of differential pressure drop in mixing function. Valves are normally closed without actuator ie stem is closing upwards. The combination with ESBE actuator ALG400 is also normally closed with stem going upwards.

VERSIONS

The series consist of 3 different versions:

- VLG122 2-way with external thread (flat sealing)
- VLG132 3-way with external thread (flat sealing)
- VLG142 3-way with by-pass and external thread (flat sealing)

SUITABLE ACTUATORS

- ALG400

TECHNICAL DATA


Pressure class: PN 16
Stroke: 2.5 mm
Leakage: 0%
Temperature: max. +95°C min. +5°C
Media: water/glycol mixtures, max. 50%
Connection: External thread (G), ISO 228/1

Material
Body: Brass CW617N
Stem: PPS, GF50%
Seallings, O-ring: EPDM
Spring: Stainless steel

Conformities and certificates:


CE PED 2014/68/EU, article 4.3

VALVE MOUNTING

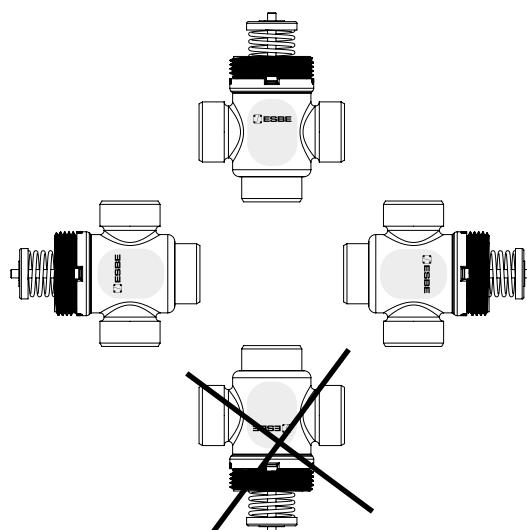


LINEAR MOTORIZED VALVES


FAN COIL VALVE SERIES VLG100



VLG122

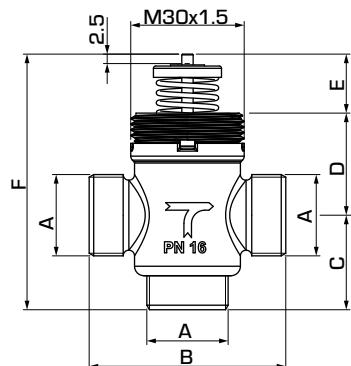

VLG132

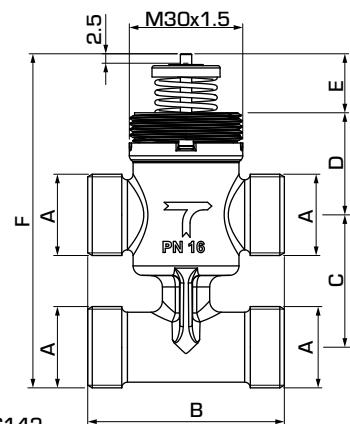

VLG142

2-WAY VALVE SERIES VLG122

| Art. No. | Reference | DN | Kvs* | A | B | C | D | E | F | Weight [kg] | Note |
|----------|-----------|----|------|--------|----|----|----|----|----|-------------|------|
| 21500100 | VLG122 | 15 | 0.25 | G 1/2" | 52 | 23 | 27 | 16 | 65 | 0.12 | |
| 21500200 | | | 0.4 | | | | | | | 0.12 | |
| 21500300 | | | 0.63 | | | | | | | 0.12 | |
| 21500400 | | | 1 | | | | | | | 0.12 | |
| 21500500 | | | 1.6 | | | | | | | 0.12 | |
| 21500600 | | 20 | 2.5 | G 3/4" | 56 | 24 | 26 | 16 | 65 | 0.15 | |
| 21500700 | | | 4 | | | | | | | 0.38 | |
| 21500800 | | | 6.3 | | | | | | | 0.36 | |

* Kvs-value in m³/h at a pressure drop of 1 bar.

3-WAY VALVE SERIES VLG132

| Art. No. | Reference | DN | Kvs* A | Kvs* B | ΔP | A | B | C | D | E | F | Weight [kg] | Note |
|----------|-----------|----|-----------|-----------|-----------|--------|----|----|----|----|----|-------------|------|
| 21501100 | VLG132 | 15 | 0.25 | 0.25 | 4.0 | G 1/2" | 52 | 25 | 27 | 16 | 65 | 0.13 | |
| 21501200 | | | 0.4 | 0.4 | 4.0 | | | | | | | 0.13 | |
| 21501300 | | | 0.63 | 0.63 | 4.0 | | | | | | | 0.13 | |
| 21501400 | | | 1 | 0.63 | 3.5 | | | | | | | 0.13 | |
| 21501500 | | | 1.6 | 1 | 3.5 | | | | | | | 0.13 | |
| 21501600 | | 20 | 2.5 | 1.6 | 3.5 | G 3/4" | 56 | 34 | 26 | 16 | 65 | 0.17 | |
| 21501700 | | | 4 | 2.5 | 1.0 (0.4) | | | | | | | 0.41 | |
| 21501800 | | | 6.3 | 4 | 1.0 (0.4) | | | | | | | 0.40 | |

3-WAY VALVE WITH BY-PASS SERIES VLG142

| Art. No. | Reference | DN | Kvs* A | Kvs* B | ΔP | A | B | C | D | E | F | Weight [kg] | Note |
|----------|-----------|----|-----------|-----------|-----------|--------|----|----|----|----|----|-------------|------|
| 21502100 | VLG142 | 15 | 0.25 | 0.25 | 4.0 | G 1/2" | 52 | 35 | 27 | 16 | 88 | 0.20 | |
| 21502200 | | | 0.4 | 0.4 | 4.0 | | | | | | | 0.20 | |
| 21502300 | | | 0.6 | 0.6 | 4.0 | | | | | | | 0.20 | |
| 21502400 | | | 1 | 0.6 | 3.5 | | | | | | | 0.20 | |
| 21502500 | | | 1.6 | 1 | 3.5 | | | | | | | 0.20 | |
| 21502600 | | 20 | 2.5 | 1.6 | 3.5 | G 3/4" | 56 | 50 | 26 | 16 | 98 | 0.27 | |
| 21502700 | | | 4 | 2.5 | 1.0 (0.4) | | | | | | | 0.52 | |
| 21502800 | | | 6.3 | 4 | 1.0 (0.4) | | | | | | | 0.51 | |



* Kvs-value in m³/h at a pressure drop of 1 bar.

LINEAR MOTORIZED VALVES



FAN COIL VALVE SERIES VLG100

VALVE CHARACTERISTICS


- Port A
- Port B

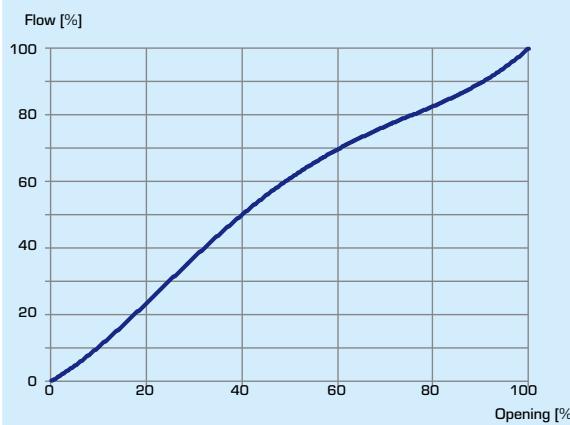


VLG122, Kvs 0.25, 0.4, 0.63

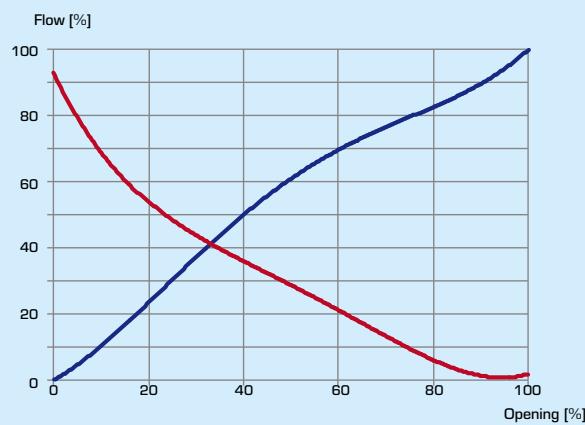


VLG132/VLG142, Kvs 0.25, 0.4, 0.63

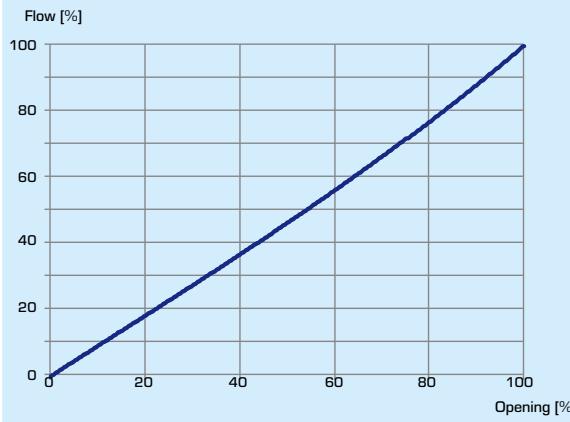


VLG122, Kvs 1.0, 1.6

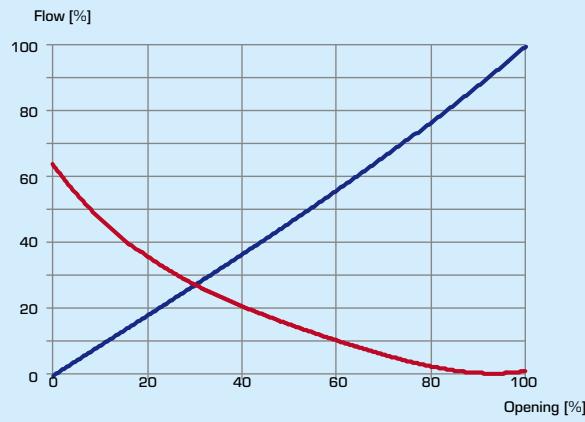

VLG132/VLG142, Kvs 1.0, 1.6

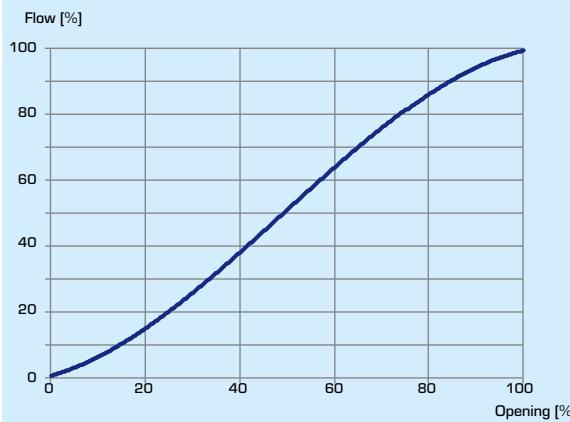

VLG122, Kvs 2.5, 4, 6.3

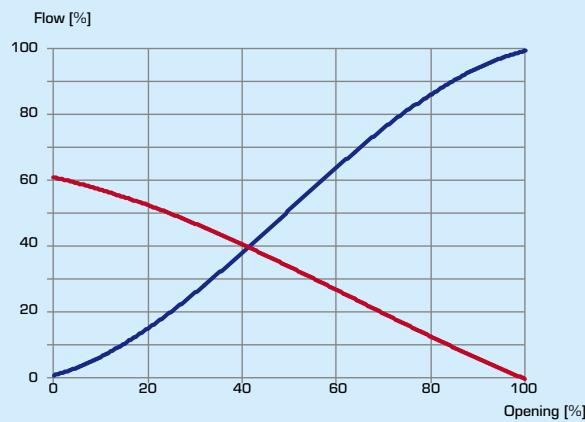


VLG132/VLG142, Kvs 2.5, 4, 6.3

LINEAR MOTORIZED VALVES


FAN COIL VALVE SERIES VLG100

FLOW CHART


To be considered: As both the viscosity and the thermal conduction are affected when glycol is added to the system water, this fact has to be considered when dimensioning the valve.

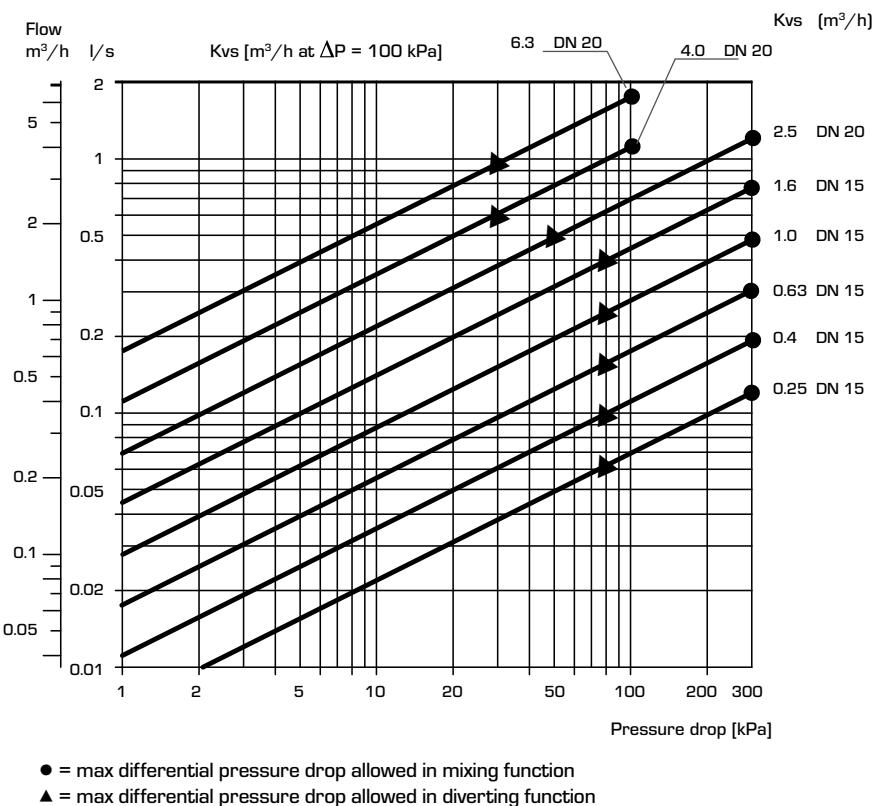


INSTALLATION EXAMPLES

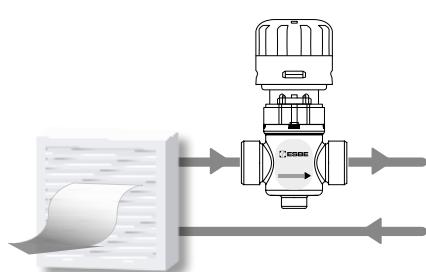

VLG122

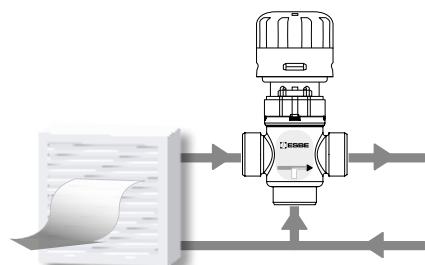

VLG132

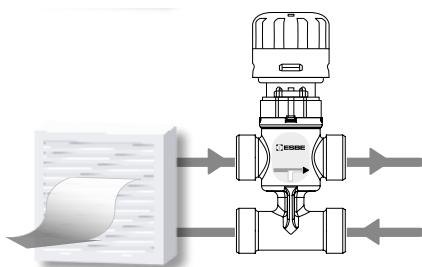

VLG142