

VARIOCON N Connection Valve

simplex



Only allow work on heating and domestic water systems to be performed by qualified personnel and in accordance with the respective applicable regulations, guidelines and rules of engineering.



Refer in particular to:


DIN 18380 Heating systems and central hot water supply systems

VDI 2035 Scale formation in domestic water heating systems and water heating systems

BGV German Professional Association Regulations (accident prevention regulations)

(DIN = The German Institute for Standardisation
VDI = Association of German Engineers)



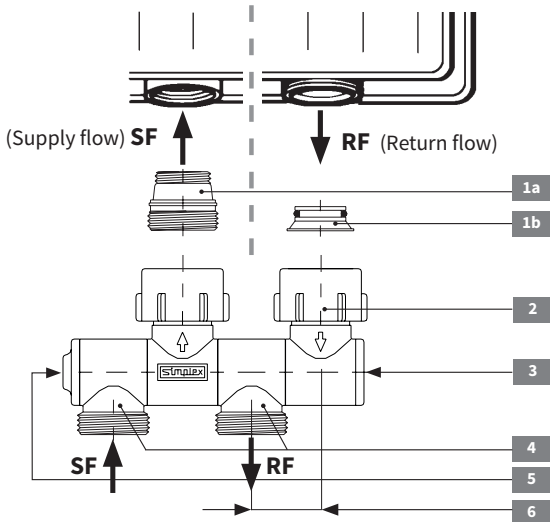

- 1a** Connection nipple 1/2" x 3/4" (flat seal) for radiators with 1/2" female thread or
- 1b** Cone inserts for radiators with 3/4" male thread (Euro taper)
- press into radiator connection
- 2** Union nut 3/4"
- 3** Shut-off return flow
- 4** Swivelling connection elements with 3/4" male thread (Euro taper)
- 5** Shut-off supply flow
- 6** Offset: 25 mm

Shut-off: Turn the lateral spindles (3 und 5) to the right until stop using Allen key 4 mm.

The illustrations are symbolic and may differ from the respective product.
Errors and technical changes reserved.

01/2017

Simplex Armaturen & Systeme GmbH

D-88260 Argenbühl | Tel. +49 75 66 94 08-0 | Fax. +49 75 66 94 08-75

www.simplex-armaturen.de